

SC 810W

Recommended Application:


Highway

Optional Application:

Regional

Trailer Axle

Medium And Long Distances

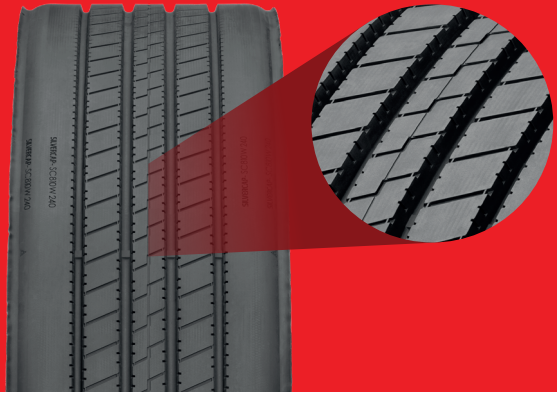

CHARACTERISTICS

Light tread with side wings and rounded shoulders to minimize the effect of side drag in maneuvering.

TECHNICAL DATA

N#	Width		Tread Depth		Weight/m/Lbs./Foot			Weight/unit/Lbs.		Recommended Tire	Size	Length	
	mm	In	mm	In	kg/m	Lbs/m	Lbs/ft	kg	Lbs			mm	ft
8.5	220	8 5/8	9	11/32	2,47	5,45	1,66	7,69	16,95	275/80R22.5	P	3,120	10,236
8.5	220	8 5/8	9	11/32	2,47	5,45	1,66	7,90	17,42	295/80R22.5 11R22.5	M	3,200	10,499
9	230	9	9	11/32	2,57	5,67	1,72	7,93	17,48	275/80R22.5	P	3,090	10,138
9	230	9	9	11/32	2,56	5,64	1,72	8,15	17,97	295/80R22.5 11R22.5	M	3,180	10,433
9.5	240	9 4/8	9	11/32	2,67	5,89	1,79	8,30	18,30	275/80R22.5	P	3,110	10,203
9.5	240	9 4/8	9	11/32	2,67	5,89	1,79	8,53	18,81	295/80R22.5	M	3,200	10,499
10	250	9 7/8	9	11/32	2,74	6,04	1,84	8,77	19,33	295/80R22.5	M	3,200	10,499

PRECURED TREADS - SILVERCAP



WWW.SILVERCAPRUBBER.COM