

# SC 827W

Recommended Application:


Highway

Optional Application:

Regional

Trailer Axle

Medium and Long Distances

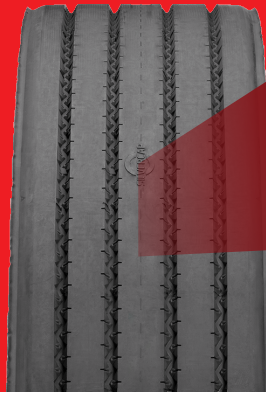

## CHARACTERISTICS

High performance band with “wing” grooves, side frame and rounded shoulders.

## TECHNICAL DATA

N#	Width		Tread Depth		Weight/m/Lbs./Foot			Weight/unit/Lbs.		Recommended Tire	Size	Length	
	mm	In	mm	In	kg/m	Lbs/m	Lbs/ft	kg	Lbs			mm	ft
9	230	9	13	16/32	3,58	7,89	2,40	11,11	24,49	275/80R22.5	P	3,110	10,203
9	230	9	13	16/32	3,58	7,89	2,40	11,45	25,24	295/80R22.5	M	3,200	10,499
9	230	9	13	16/32	3,58	7,89	2,40	11,78	25,97	12R22.5   11R24.5	E	3,290	10,794
9.5	240	9 4/8	13	16/32	3,74	8,25	2,51	11,68	25,75	275/80R22.5	P	3,130	10,269
9.5	240	9 4/8	13	16/32	3,74	8,25	2,51	11,97	26,39	295/80R22.5	M	3,200	10,499
10	250	9 7/8	13	16/32	3,89	8,58	2,62	12,15	26,79	275/80R22.5	P	3,120	10,236
10	250	9 7/8	13	16/32	3,89	8,58	2,62	12,44	27,43	295/80R22.5	M	3,200	10,499
10.5	260	10 2/8	13	16/32	4,05	8,93	2,72	12,95	28,55	295/80R22.5	M	3,200	10,499

PRECURED TREADS - SILVERCAP



WWW.SILVERCAPRUBBER.COM